




Manhole Tools

Pel-Brite work lights are rugged and shock protected against dropping or falling, and are precision engineered from non-breakable, noncombustible materials. Designed for dependable service under extreme conditions. Cool to the touch, easy on the eyes, and color corrected. Available in 120 volt AC or 12 volt DC. Standard lamps are 8, 15, 20, 30, and 40 watt and come with either 25 or 50 foot cords.

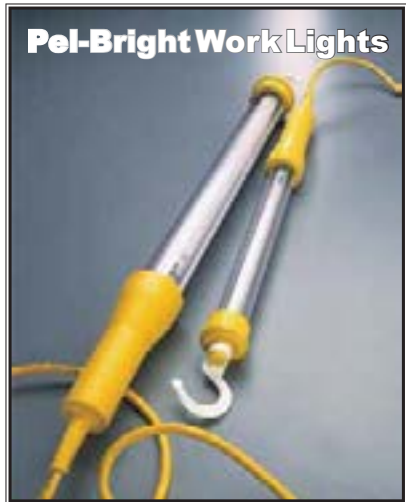

Pel-Bright Work Lights

Model	120 Volt AC Description	Weight
8-1525	15 Watt, 26.5" L, 25' cord	5 lbs
8-1550	15 Watt, 26.5" L, 50' cord	6 lbs
8-2025	20 Watt, 32" L, 25' cord	7 lbs
8-2050	20 Watt, 32" L, 50' cord	8 lbs
8-3025	30 Watt, 45" L, 25' cord	9 lbs
8-3050	30 Watt, 45" L, 50' cord	10 lbs
8-4025	40 Watt, 56" L, 25' cord	11 lbs
8-4050	40 Watt, 56" L, 50' cord	12 lbs

* Water resistant seal - can NOT be submerged in water

Safety

HAZARDOUS LOCATION

PelBrite Lantern 8-6VEX

- EXPLOSION PROOF
- PIVOTING/ROTATING HEAD
- CUSTOM COLORS AVAILABLE
- FIVE LIGHT PATTERNS
- TRIGGER ACTIVATED LIGHTS
- CSA APPROVED
- CHARGING TYPE INTRINSICALLY SAFE



Model	120 Volt AC Description	Weight
26W25EX	26 Watt, 25' cord	11 lbs
26W50EX	26 Watt, 50' cord	15 lbs

Hazardous Locations Lights

Pel-Brite work lights are rugged and shock protected against dropping or falling, and are precision engineered from non-breakable, noncombustible materials. Designed for dependable service under extreme conditions. Cool to the touch, easy on the eyes, and color corrected.

This safety light is designed for hazardous locations. Cord, ballast and lamp are FM and CSA approved for:

- Class I, DIV 1 & 2, Groups C & D,
- Class II, DIV 1 & 2 Groups E, F, & G,
- Class III, DIV 1 & 2

as defined by the Article 500 of the National Electrical Code. Pel Bright Work Lights are water tight to meet N.E.M.A. 4 Standard.

} Certified Standards

